

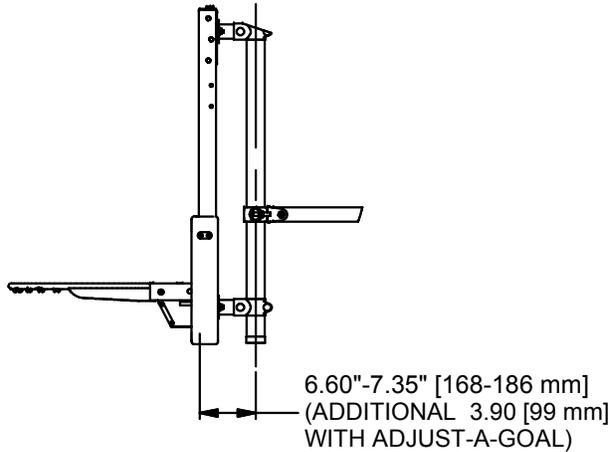


DETAIL B

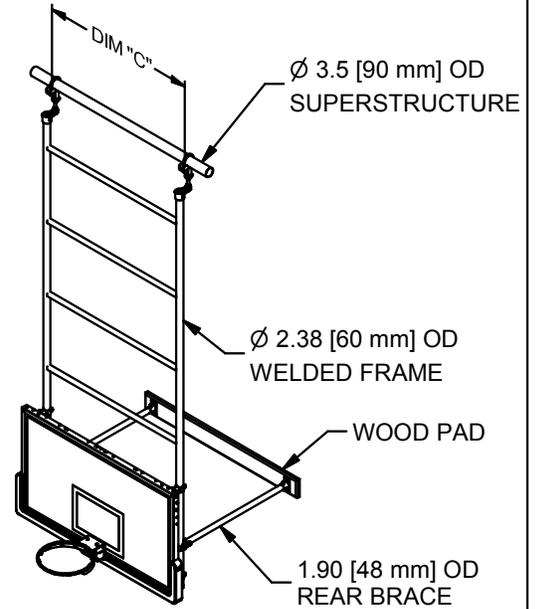

DETAIL A

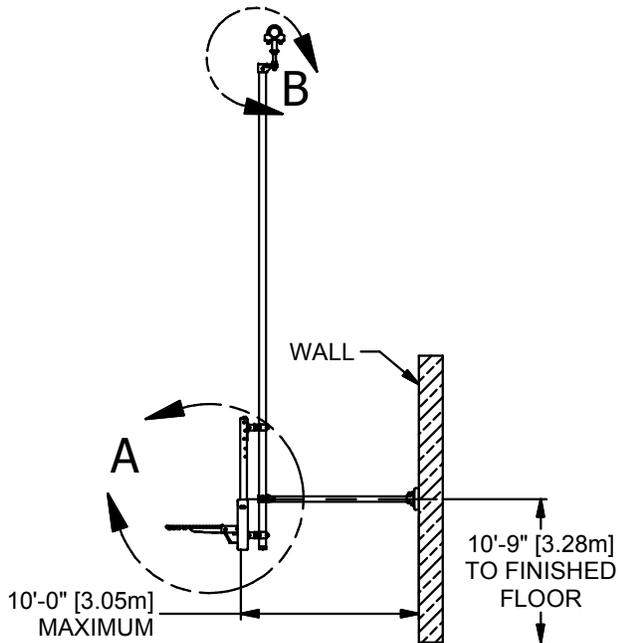

NOTE: DIM "C" IS 63" [1600 mm] WITH A RECTANGULAR BACKBOARD AND 35" [889 mm] WITH A FAN SHAPED BACKBOARD

PN	TRUSS HEIGHT	DIM "C"
2215-18	18' to 19'	63" [1.6M] REC
	[5.49-5.78M]	35" [0.89M] FAN
2215-19	19' to 20'	63" [1.6M] RECT
	[5.79-6.09M]	35" [0.89M] FAN
2215-20	20' to 20.99'	63" [1.6M] RECT
	[6.10-6.39M]	35" [0.89M] FAN
2215-21	21' to 21.99'	63" [1.6M] RECT
	[6.40-6.70M]	35" [0.89M] FAN
2215-22	22' to 22.99'	63" [1.6M] RECT
	[6.71-7.0M]	35" [0.89M] FAN
2215-23	23' to 23.99'	63" [1.6M] RECT
	[7.01-7.31M]	35" [0.89M] FAN

D	JJC	08-07-19
C	RWP	08/13/08
B	RWP	05/23/08
A	JJC	12/12/03
REV	BY	DATE

GARED

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

WALL BRACED STATIONARY BACKSTOP

DRAWN CONNERLEY	DATE 4/24/2003	DATE ISSUED 4/24/2003
APPROVED	DATE	

FILE LOC. Q:\Inventor Files\Specification Files\04_Dual Post

SIZE A	SCALE	SHT. NO. 1 OF 2	PART NO. 2215	REV D
------------------	-------	--------------------	-------------------------	-----------------



MODEL 2215

WELDED DUAL POST WALL BRACED STATIONARY BASKETBALL STRUCTURE

RECOMMENDED APPLICATION

This unit is designed for applications not requiring the structure to fold into a storage position and the wall will support wall mounted rear brace. The 2215 dual post unit can be used at heights from 18' to 24' and when a height adjuster is not required. For heights above 24' or when a height adjuster is required, the model 2615 is recommended.

SUPERSTRUCTURE

Unit shall be supported from 3-1/2" O.D. x 0.120" wall ASTM A-500 Grade B horizontal and 2-3/8" O.D. x 14 gauge (0.083") wall ASTM A-500 Grade B vertical structural steel tubing secured to the building with heavy gauge steel stampings or weldments (as required by building conditions). When truss span widths exceed 10'-0", 3-1/2" O.D. x Schedule 40 (0.216") wall ASTM A-500 Grade B may be used for the horizontals. Spans over 14'-0" may use welded bridge pipe.

BACKSTOP

The backstop shall have two 2-3/8" O.D. x 14 gauge (0.083") wall ASTM A-500 Grade B vertical drop tubes spaced at 63" centers for rectangular backboards, 35" for fan shaped backboards. Vertical drops shall be cross-braced with 2-3/8" O.D. x 14 gauge (0.083") wall ASTM A-500 Grade B and 1-7/8" O.D. x 14 gauge (0.083") wall ASTM A-513 steel tubing welded on both ends. Ends of cross-brace tubes shall be saddle (die) cut to fit the outside diameter of the 2-3/8" O.D. drop tubing. Drop pipe shall be suspended with welded steel plate offset hangers 4" in front of the pivot point, less than 4" not approved as equal. All critical fittings shall be heavy gauge steel stampings, or weldments. Backstop manufactured in accordance with 1994 NCAA rule 1, section 8, stating that all parts of the backboard support system not directly behind backboard shall be at least 6" behind backboard.

Wall brace shall be 1-7/8" O.D. x 14 gauge (0.083") wall ASTM A-513 steel tubing attached to the vertical drop pipe approximately 12" to 18" above the bottom the bottom of the vertical drop tubing.

All steel has a black powder coat finish, standard. Optional colors are available.

Accessories

Backboards and Goals - See the backboards and goals section in the specification manual.

Backboard Padding - See the accessories section in the specification manual.

Subject to design change and current manufacturing practices.