



CURVE AND STACK DETAIL (OPTIONAL)

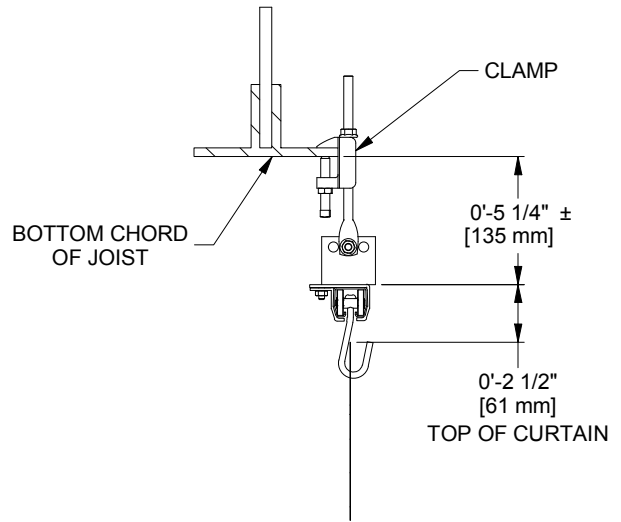

JOIST ATTACHMENT DETAIL

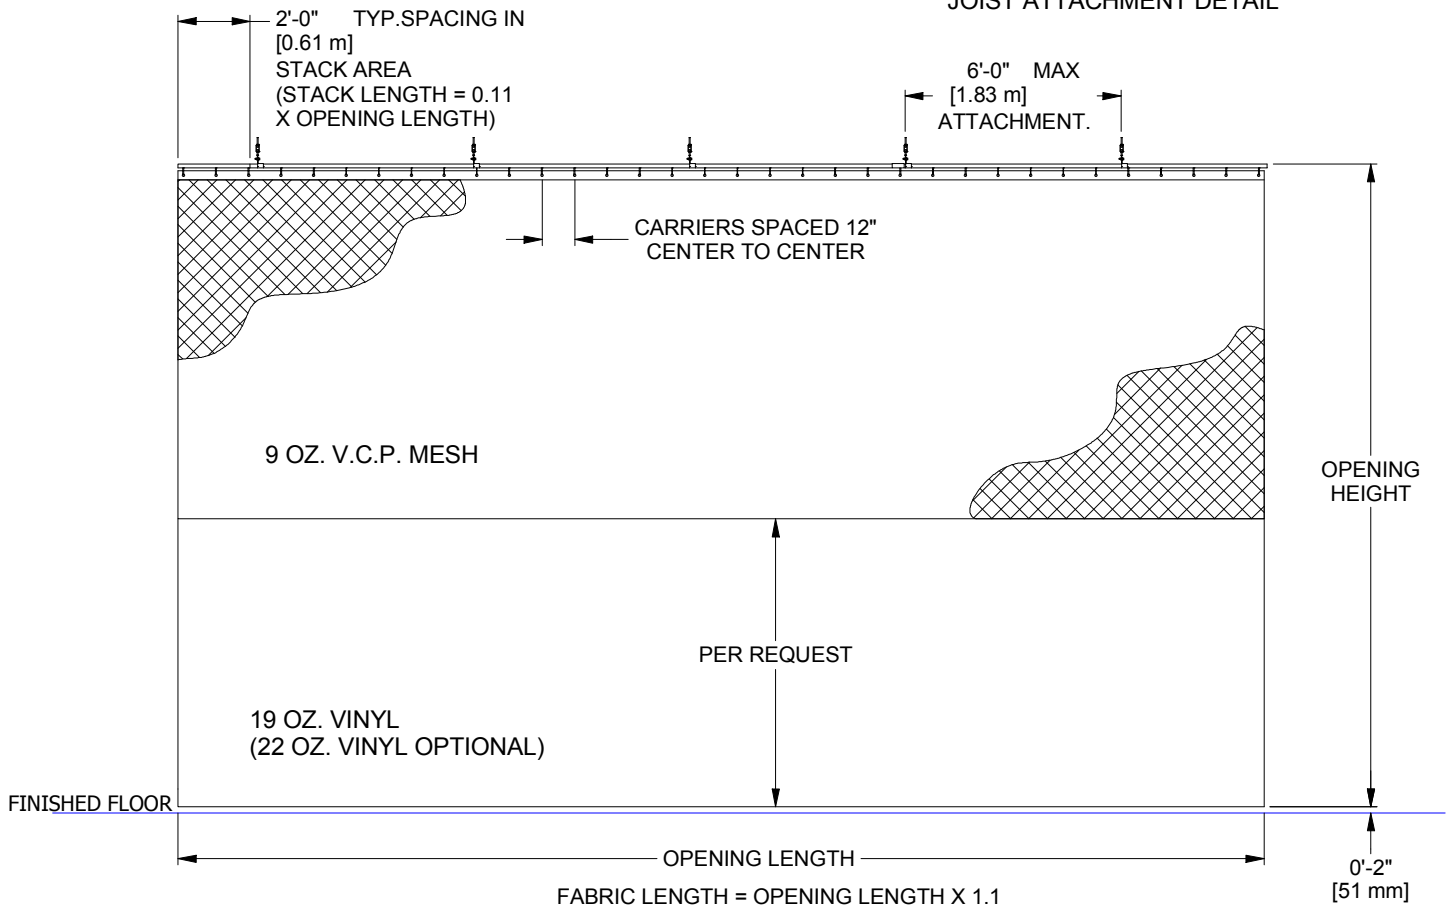

NOTE: 22 OZ. VINYL ONLY AVAILABLE IN RED, ROYAL BLUE, OR GRAY

E	JJC	11/21/19
D	JJC	11/29/11
C	DAM	07/21/09
B	RWP	05/21/09
A	MJB	12/17/03
REV	BY	DATE



Gared Holdings, LLC  
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

WALK DRAW CURTAIN

DRAWN CONNERLEY		DATE 4/22/2003	DATE ISSUED	
APPROVED		DATE		
FILE LOC. Q:\Inventor Files\Specification Files\10_Curtains				
SIZE <b>A</b>	SCALE NONE	SHT. NO. 1 OF 2	PART NO. <b>4013</b>	REV <b>E</b>



## **MODEL 4013**

### **WALK-DRAW DIVIDER CURTAIN**

#### **MATERIAL**

The lower section, height to be specified at time of order, shall be solid 19 oz. or 22 oz. polyester reinforced, fire retardant and mildew resistant vinyl fabric. All seams shall be electronically welded with a full contact weld that fuses the material together for superior strength. A pocket shall be formed along the bottom edge to accommodate a 4/0 coil proof chain for ballast. The upper section shall be a 9 oz. vinyl coated polyester mesh. The top hem shall be a double thickness of mesh reinforced with a vinyl strip. Grommets shall be attached along the vinyl strip and located 12" on center for attachment to carrier assemblies. Curtain shall stop 2" above the finish floor and can be specified, either all mesh, all vinyl or any combination in between. The curtain fabric shall be 10% longer than the curtain opening.

#### **STRUCTURE**

The track shall be an enclosed galvanized steel channel 1-7/16" wide and 1-1/4" high. Track suspension spacing shall not exceed 6'0" center to center in the run of the curtain and 2'0" in the storage area. Curtain may either be stacked against the wall or with the addition of an optional curved section of track, the curtain may be stored along the wall for even more clearance. The storage length shall be minimum of 11% of curtain opening length. Carrier assemblies shall have two 1" diameter polyurethane wheels spaced on 12" centers. Also, curtain shall be supplied with a 1/4" polyester tow rope to operate the curtain.

#### **ACCESSORIES**

##### **TIE BACK STRAP**

Optional curtain tie back strap is model 4019. See curtain divider section of the specification manual.

**Subject to design change and current manufacturing practices.**