IMPORTANT: THE VOLTAGE PROVIDED MUST BE STABLE. IF UNSTABLE CAN CAUSE PROBLEMS WITH SYSTEM.


NOTE: AUTHORIZED USER MUST

MOTOR ELECTRICAL REQUIREMENTS

15 AMP SERVICE, PER BOX AND PER DEVICE MINIMUM CIRCUIT REQUIREMENTS -DEDICATED 120VAC, 1PH, 60HZ,

ALL TERMINALS ACCEPT ONLY 10GA MAX

ALL OTHER ELECTRICAL, JUNCTIONS AND SYNCHRONIZER BOXES ARE TO ELECTRICAL CONTRACTOR. FOLLOW MANUFACTURER'S INSTRUCTIONS. HAVE FULL VIEW OF GYMNASIUM EQUIPMENT AT ALL TIMES WHEN BE INSTALLED BY A CERTIFIED ALL LOCAL CODES AND OPERATING.

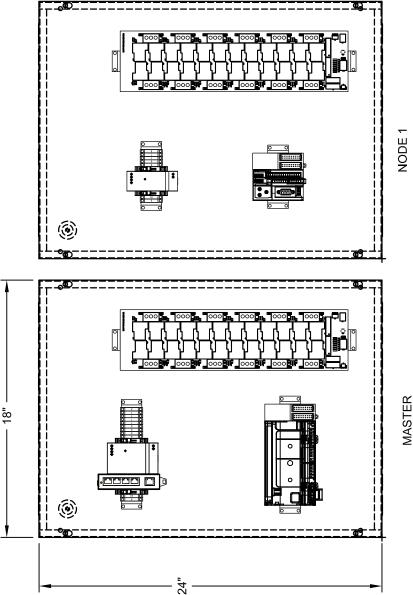

Α

NOTED

1 OF 3

TERMINALS PER DEVICE **ASSIGNMENT SHEET** WIRE MOTOR ON NOTE

NOTE: THIS DRAWING IS FOR REFERENCE ONLY. REFER TO THE TSC INSTALLATION WIRING INSTRUCTIONS

NCLUDED IN THE SUBMITTAL PACKAGE FOR SPECIFIC WIRE TERMINATION INFORMATION

REVISION DATE REV. ΒY



THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

| TSC 1500XL WiFi | | | | | | | | | |
|-----------------|------------|---------|--------|------------|--------|------|----------|----------|---------|
| DRAWN | PERRY | | DATE | 8-29-17 | MATERI | AL N | I/A | | |
| APPROVE |) <u>-</u> | | DATE | - | FINISH | N/A | | | |
| FILE LOC | Q:\Final | Release | e\Spec | ifications | | | DWG. NO. | TSC 1500 | KL WiFi |
| SIZE | SCALE | SHT | NO | PART NO | | | | | RFV |

TSC 1500XL WiFi



OPERATION SELECTION PAGE

FAST PLAY SYSTEM: 8 USER LEVEL PROGRAMMABLE GROUP BUTTONS.

ALLOWS SELECTION OF MULTIPLE

CAPABLE

PLAY GROUPS CAN BE EDITED AT ANY

POINT. FAST PLAY CAN ALSO SELECT

COMBINATIONS OF EQUIPMENT.


DIFFERENT GROUP

DIRECTIONS SIMULTANEOUSLY. FAST

OF MOVING DEVICES DIFFERENT

DEVICES AT A TIME (WITH THE RECOMMENDED POWER FEED).

-ALPHA NUMERIC PASSWORD SYSTEM -INFINITE PROGRAMMABLE USERS WITH DIFFERENT USER LEVELS

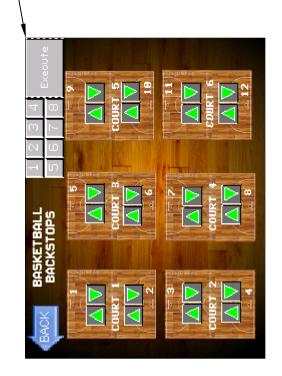

NOTED

2 OF 3

LARGE LAYOUT EXAMPLE

NOTE: SYSTEM OPERATES THROUGH AN APP. NO NETWORK OR SEPARATE SERVERS REQUIRED; INDEPENDENT WIRELESS SYSTEM.

| | REVISION | | | | | | |
|------|----------|----|--|--|--|--|--|
| REV. | DATE | BY | | | | | |
| - | - | - | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

User

Group

Passvord

Confirm Passvord



DELETE

JPDATE


ADD

9200 E. 146th St. Noblesville, IN 46060

| USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED. | | | | | | | | |
|---|------------|------|-------------------|----------|--------------|------------------------|--|-----|
| TSC 1500XL WiFi COMM. SCH | | | | | | | | |
| DRAWN PERRY | | | DATE | 8-29-17 | MATERIAL N/A | | | |
| APPROVE |) <u>-</u> | | DATE _ FINISH N/A | | | | | |
| FILE LOC. Q:\Final Release\Specifications | | | | | | DWG. NO. TSC 1500XL Wi | | |
| SIZE | SCALE | SHT. | NO. | PART NO. | | | | REV |

TSC 1500XL WiFi

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY

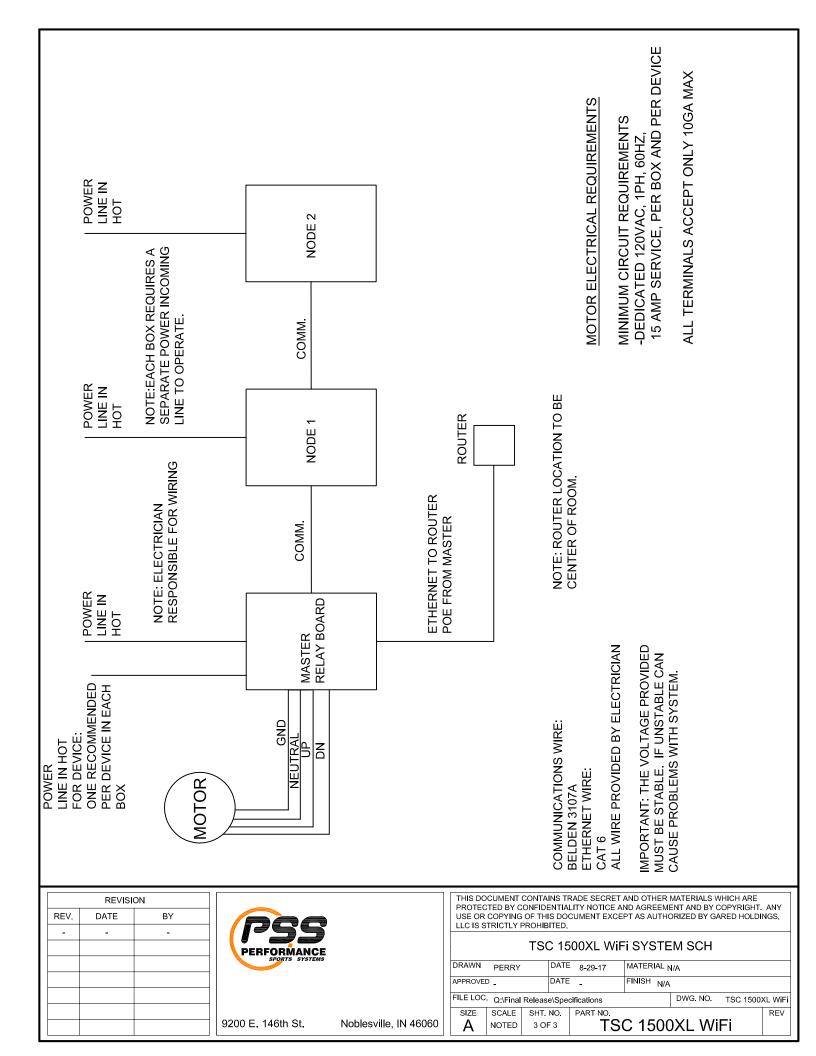





TSC1500XL WiFi Wireless Gym Control System

RECOMMENDED APPLICATION

The TSC1500XL WiFi Total System Control unit allows one touch operation of basketball backstops, divider curtains, lighting, scoreboards, P.A. systems or other electrically controlled equipment. The system is wirelessly controlled using a smart phone or a tablet device that will connect to a standalone WiFi network. SMART PHONE, TABLET AND PURCHACE OF THE VIJEO DESIGN' AIR APP NOT INCLUDED

SPECIFICATIONS

The Total System Control 1500XL WiFi will include a single master relay node capable of operating 12 devices. The system is expandable up to 16 relay nodes until 192 devices are reached. Relay circuits are capable of up to 250v with a 20 amp load. There are 24 relays per relay node. Size of each relay node enclosure is 18" wide X 24" tall X 6" deep.

The Total System Control 1500XL WiFi uses a 5.7" touch screen that will have the ability to be wirelessly controlled via smart phone or tablet (Not included) through the Vijeo Design' Air app. The system operates on 120v with the controller interface operating on 24vdc from the supplied transformer. The TSC1500XL WiFi will operate devices individually along with a user interface for multiple device configurations and operations as long as each device is on a dedicated circuit. The TSC1500XL WiFi has expandability for operating additional equipment by adding additional relay nodes.

Included

- 1. Manual Control override with 15' cord, which is to be used at the master relay node as a back-up to the touch screen.
- 2. Master relay node with touch screen mounted on the outside.

Optional at additional cost

- 1. TSC1500XL-RB: Additional relay nodes for operating additional devices
- 2. TSC-DG: Display guard to protect the touchscreen
- 3. TSC-RS: Remote screen location package, Allows the screen to be installed in another location from the master relay node face.
- 4. TSC-7.5: Screen size upgrade to 7.5"
- 5. TSC-ROUTER: Additional router for large areas. Each router services a 450ft diameter.
- 6. Facility's logo displayed on the touch screen.
- 7. Vijeo Design Air App. (purchased by others)

SAFETY FEATURES

Password controlled to prevent unauthorized use. Infinite users can be created and complex Alpha Numeric passwords as well. "Press and hold" button feature prevents authorized operator from walking away while equipment is in motion. Auto shut-off after thirty seconds of non-use.

WARRANTY

The TSC1500XL WiFi Total Control System has a one-year warranty covering defects in material and workmanship.

All other electrical, junction and synchronizer boxes not mentioned above to be furnished and installed by a certified electrical contractor. Follow manufacturer's instructions and all local safety codes

Subject to design change and current manufacturing practices. Revised September 26, 2019 ©2008 Gared Holdings, LLC.