


12 GA STEEL STAMPED SHELL WITH 12 GA. FORMED MOUNTING AND STIFFENING CHANNELS WELDED TO REVERSE SIDE.

BOARD THICKNESS IS 1 1/2".

MOUNTING HOLES FOR 3/8" DIAMETER GOAL AND BOARD MOUNTING HARDWARE.

BOARD IS POWDER COATED GLOSS WHITE.

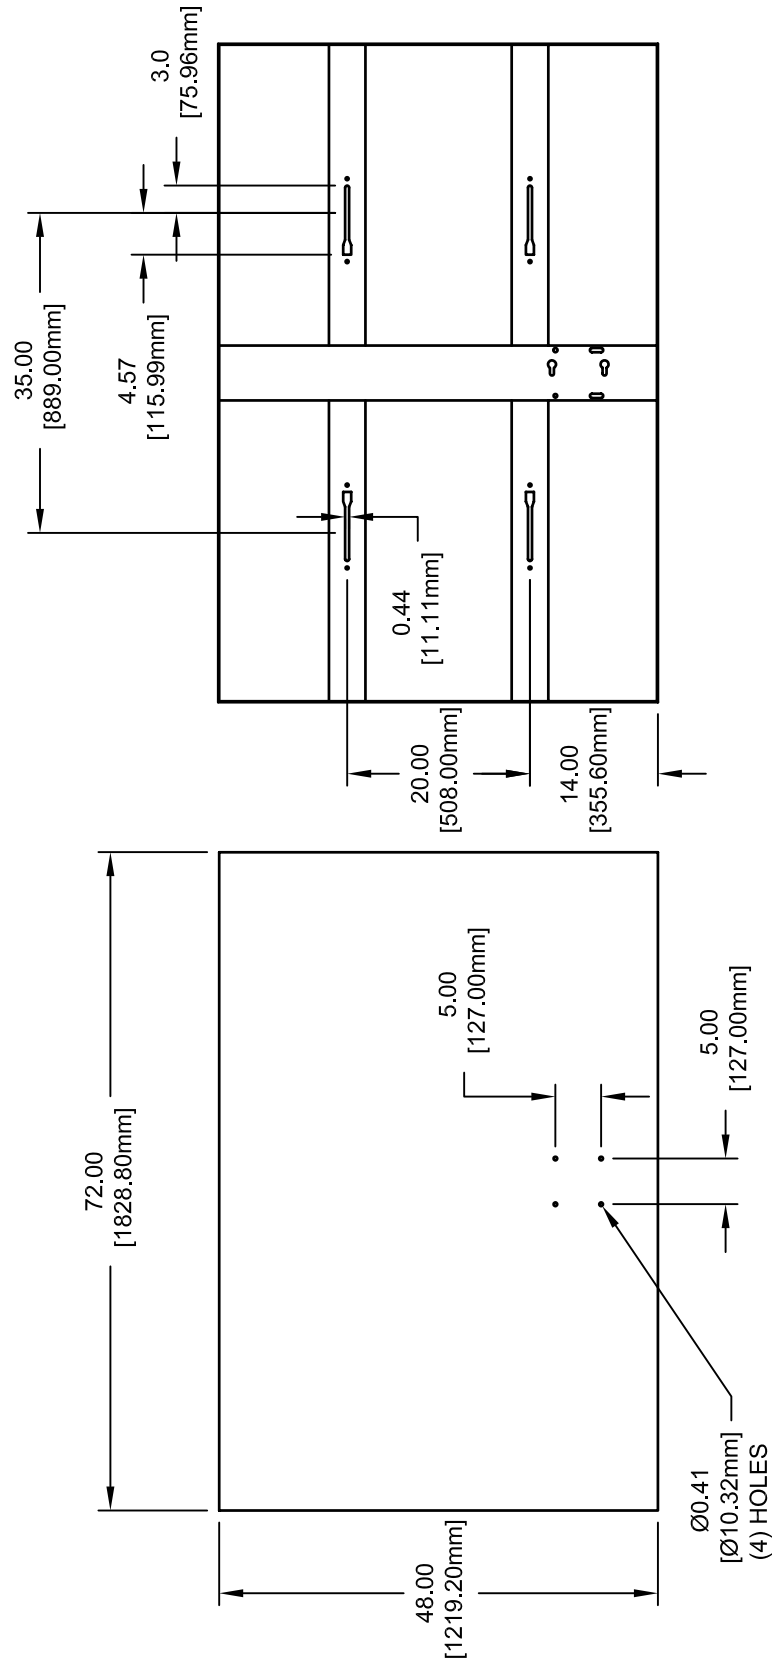

FRONT VIEW

REAR VIEW

REVISION		
REV.	DATE	BY
A	06/05/08	RWP



Gared Holdings, LLC  
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

48" X 72" RECTANGULAR STEEL BACKBOARD

DRAWN	CONNERLEY	DATE	05/05/03	MATERIAL	AS NOTED
APPROVED	JJC	DATE	05/05/03	FINISH	AS NOTED
FILE LOC. Q:\Final Release\Specifications				DWG. NO.	1270
SIZE	SCALE	SHT. NO.	PART NO.	REV	
A	NOTED	1 OF 1	1270	A	



## **MODEL 1270**

### **72" X 48" RECTANGULAR STEEL BACKBOARD**

The 1270 backboard shall be formed from a single piece of heavy gauge steel and reinforced with a heavy 10-gauge vertical center channel and heavy gauge horizontal channels. All reinforcing sections shall be welded to the shell to make a single vibration free unit. Manufacturer of backboard shall have over ten years experience producing such item.

Key-slots in the horizontal channels shall be spaced at 20" vertical and 35" horizontal. Backboard shall be phosphate pre-treated and shall have a durable white powder coat finish to protect against weathering. Goal mounting holes shall be on 5" horizontal and 5" vertical centers.

#### **ACCESSORIES**

#### **GOALS**

Compatible goals are models 726, 5500, 7550, 7555, 140, 240, 39WO, 3942, and 4039. See goal section in specification manual.