


REAR VIEW

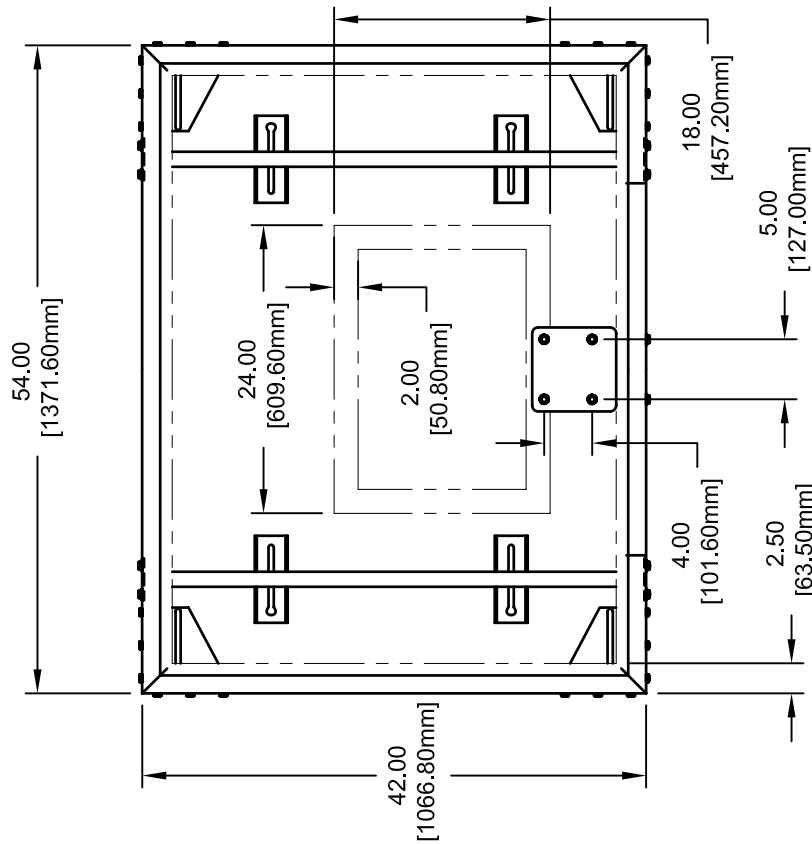

FRONT VIEW

NOTE:
 BACKBOARD THICKNESS - 2 1/8".
 MATERIAL - 1/2" THICK TEMPERED GLASS WITH STEEL FRAME.
 FINISH - GRAY POWDERCOAT ON FRAME & OTHER STEEL COMPONENTS.

REVISION		
REV.	DATE	BY
A	12/01/03	JJC
B	05/11/04	JJC
C	06/06/08	RWP



Gared Holdings, LLC
 9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

42" X 54" GLASS BOARD WITH ADAPTER BRACKET					
DRAWN	CONNERLEY	DATE	05/02/03	MATERIAL	AS NOTED
APPROVED	JJC	DATE	05/02/03	FINISH	AS NOTED
FILE LOC. Q:\Final Release\Specifications			DWG. NO.	3050RG	
SIZE	SCALE	SHT. NO.	PART NO.	REV	
A	NOTED	1 OF 1	3050RG	C	



MODEL 3050RG

STEEL FRAME 54" X 42" RECTANGULAR GLASS BACKBOARD

The 3050RG backboard shall be fabricated with heavy steel frame constructed of formed steel angles. Entire frame and components shall be powder coated with a durable neutral gray finish. Acrylic cushioning pad shall be used between steel mounting plate and glass to protect board against possible breakage.

Mounting brackets shall be positioned at 20" vertical and 35" horizontal centers for mounting backboard with standard fan-shaped mounting dimensions.

Glass shall be ½" in thickness and is fully tempered with the white target lines permanently fused onto the surface. 12mm glass will not be considered equal to ½" glass, with a nominal thickness range of .485" to .515", and will not be used as a substitute for full ½" glass. Vinyl shock absorbing material shall insulate the glass from the frame. Goal mounting holes shall be on standard 5" horizontal and 4" vertical centers.

ACCESSORIES

GOALS

Compatible goals are models 1000, 2000+, and 5500. See goal section in specification manual.