



**NOTES:**

1. GOOSENECK AND CROSSBAR ARE GALVANIZED STEEL
2. UPRIGHTS ARE HEAVY WALL ALUMINUM TUBING.
3. CROSSBAR RETAINS LEVEL BY SET SCREWS AND LOCKING BOLT.
4. GOOSENECK, CROSSBAR, AND UPRIGHTS CAN BE FURNISHED IN EITHER WHITE OR YELLOW POWDER COAT FINISH. CUSTOMER TO SPECIFY COLOR AT TIME OF ORDER.
5. THREADED ROD INSTALLED IN POST PREVENTS GOAL POST ROTATION IN CONCRETE.
6. STANDARD UNIT CAN BE USED WITH GROUND SLEEVE KIT FOR SEMI-PERMANENT INSTALLATION. GROUND SLEEVE KIT FGP400GS ORDERED SEPERATELY.
7. CONCRETE/GRAVEL FOUNDATION NOT INCLUDED.
8. OPTIONAL POST PADS SOLD SEPARATELY.
9. MODEL FGP401S CONSISTS OF (2) GOAL POSTS.

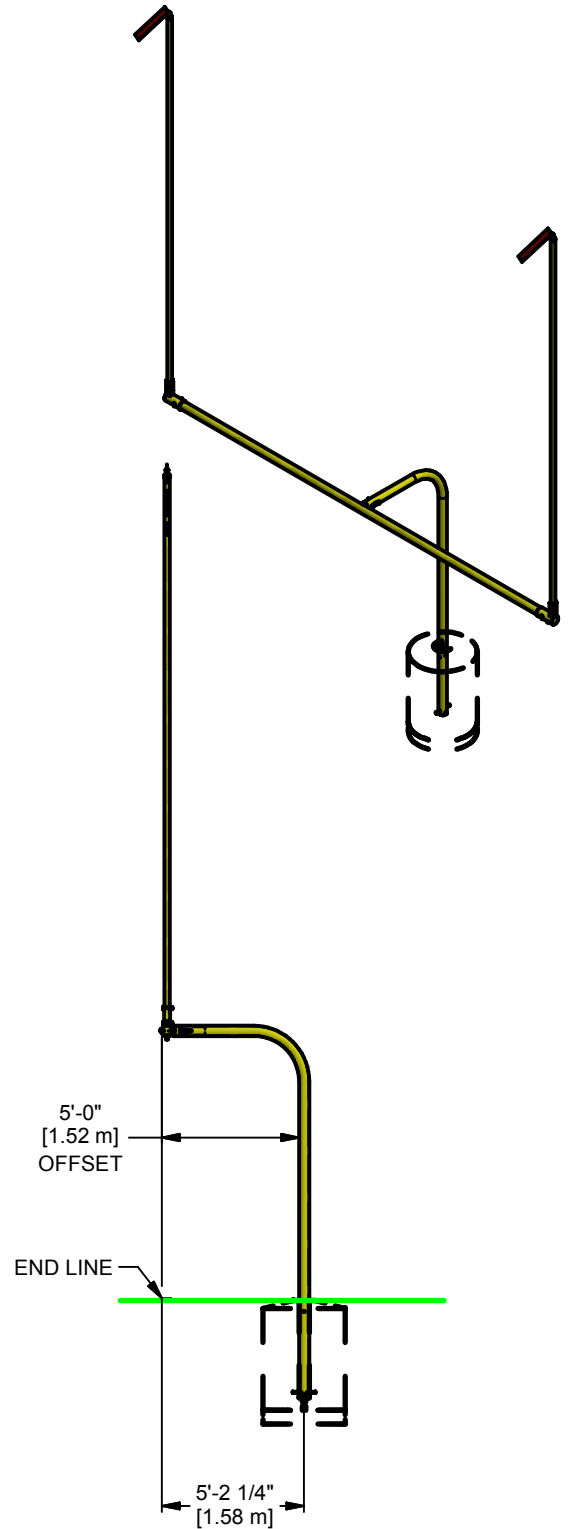

B	WDC	12-22-15
REV	BY	DATE

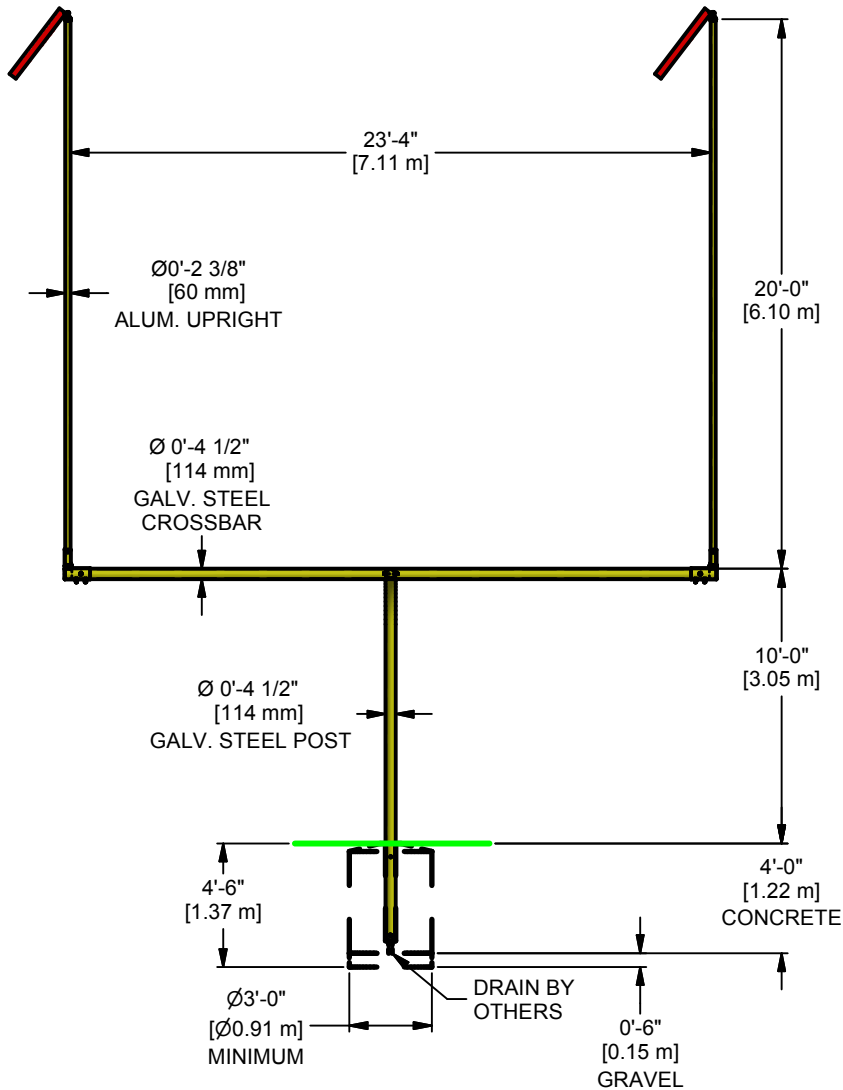


Gared Holdings, LLC  
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

**F'BALL GOAL, 4.5" POST, HS, GALVANIZED**

DRAWN CROSBY	DATE 12/22/2015	DATE ISSUED
APPROVED	DATE	

FILE LOC. Q:\Inventor Files\Specification Files\06\_Outdoor Products

SIZE <b>A</b>	SCALE	SHT. NO. 1 OF 2	PART NO. <b>FGP401S</b>	REV <b>B</b>
------------------	-------	--------------------	----------------------------	-----------------



## MODEL FGP401S

### HIGH SCHOOL FOOTBALL GOAL POST 5' OFFSET

This unit uses a gooseneck design to meet all NFSHSA specs. Goal measures 30' high with a 5' offset. Crossbar measures 23'-4" between uprights. Gooseneck post is 4 1/2" O.D. powder coated over galvanized steel. Crossbar is 4 1/2" O.D powder coated over galvanized steel. Uprights are 2 3/8" O.D powder coated aluminum tube. Uprights measure 20' above crossbar. Wind flags are included.

Unit shall be designed for permanent installation. Upright to be installed with a concrete footing approximately 36" in diameter and 48" deep. Post shall extend approximately 42" into concrete footing.

Semi-permanent installation can be achieved with the use of optional ground sleeves. Ground sleeves shall be installed in concrete footing as described in specification FGP400GS.

**Concrete and rebar for installation not included.**

**Colors are selected by specifying one of the part numbers listed below on the order.**

FGP401S	Galvanized gooseneck, crossbar
FGP401SW	White gooseneck, crossbar and upright
FGP401SY	Yellow gooseneck, crossbar and upright

#### **Optional Equipment**

FGP400GS	Ground sleeves for semi-permanent installation.
GSPPAD4	Protective post pad for posts up to 6" O.D.

Protective pads are 6' high for installation around post areas where body contact may occur. Constructed of high density urethane foam covered with 18 oz. mildew resistant and UV resistant coated vinyl. Available in the following colors: red, white, green, yellow, royal blue, black, purple, orange, and gray.