


NOTES:

1. DIMENSION IS FROM FRONT SURFACE OF POST TO FRONT FACE OF BACKBOARD. DIMENSION MAY VARY WITH BOARD SELECTION.
2. DIMENSION IS FROM UNDERSIDE OF POST ARM SURFACE TO THE PLAYING SURFACE.

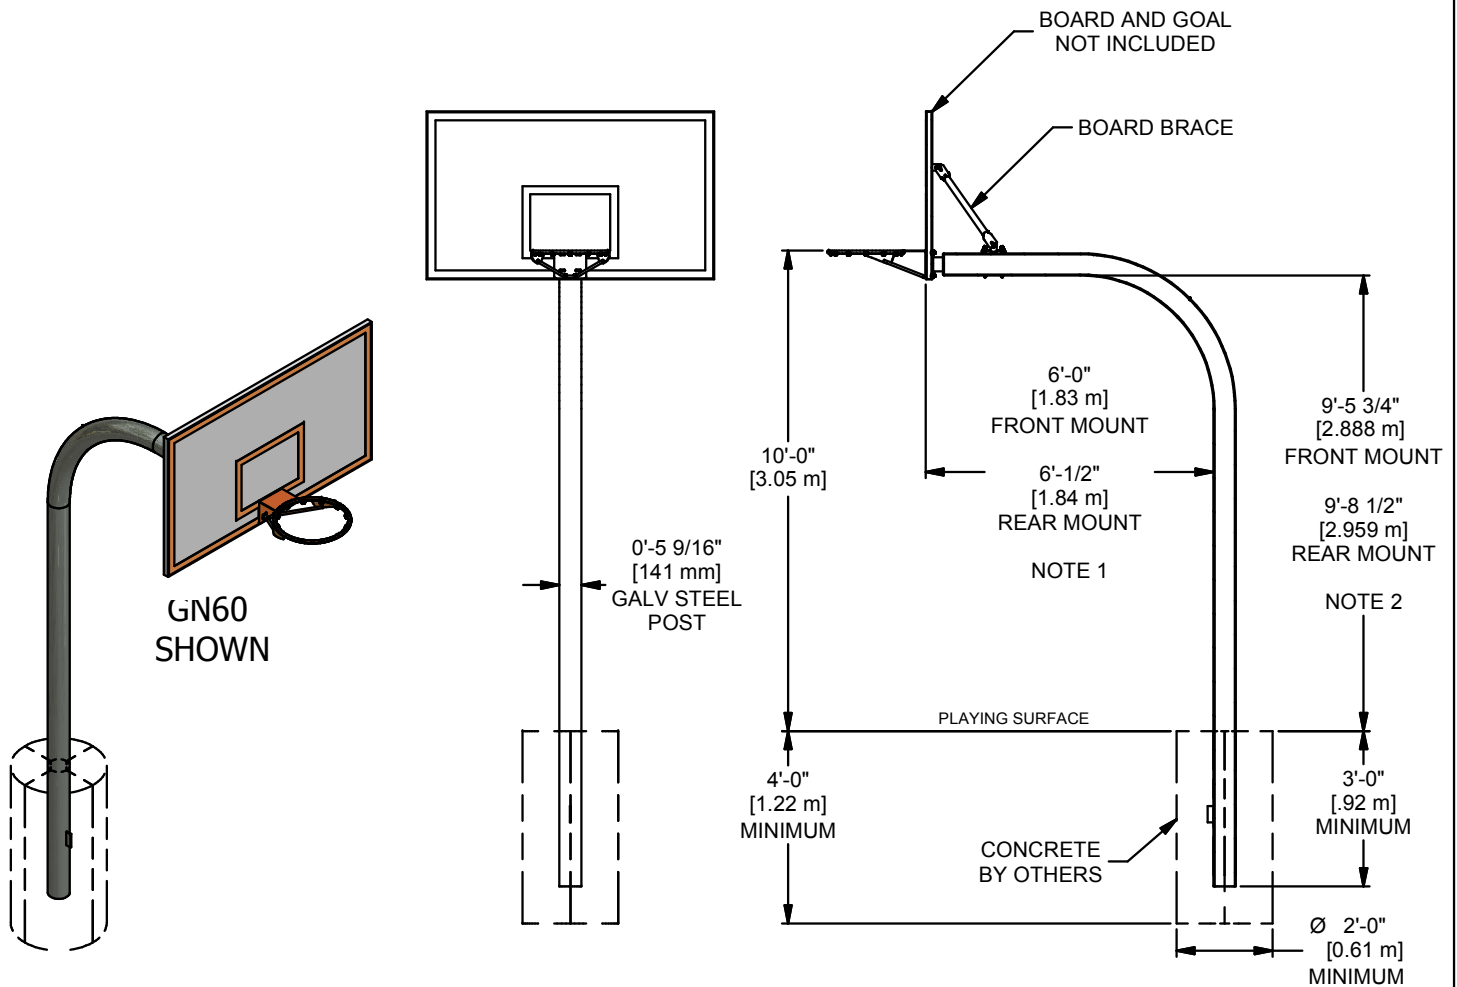

B	WDC	09-11-17
A	JJC	05/14/2010
REV	BY	DATE

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

5 9/16 BRACED GOOSENECK SYSTEM, 6 FT EXT.

DRAWN	CONNERLEY	DATE	6/3/2008	DATE ISSUED	6/3/2008
APPROVED	CONNERLEY	DATE	6/3/2008		

FILE LOC: Q:\Inventor Files\Specification Files\06_Outdoor Products

SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NONE	1 OF 2	GN60	B



MODEL GN60 & GN60R

GOOSENECK OUTDOOR BASKETBALL SYSTEM W/ BRACES

GN60 / GN60R

This unit uses a gooseneck design to extend the backboard 72" out from the post. The post shall be 5 9/16" O.D. schedule 40 (0.26") wall galvanized tube. The mounting plate is used as a direct goal attachment for the backboard. Two braces extending from the upper mounting points of the backboard to the gooseneck extension provide added rigidity to the system. The GN60 system can be used with all outdoor front mount and the GN60R system with rear mount boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

Subject to design change and current manufacturing practices.
Revised Sept. 11, 2017 ©2008 Gared Holdings, LLC