


BACKBOARD EXTENSIONS	
GOAL HEIGHT	EXTENSION
10'-0" (3.05 M)	4'-2" (1.27 M)
9'-0" (2.74 M)	3'-10" (1.17 M)
8'-0" (2.44 M)	3'-5" (1.04 M)
6'-6" (1.98 M)	2'-11" (.89 M)

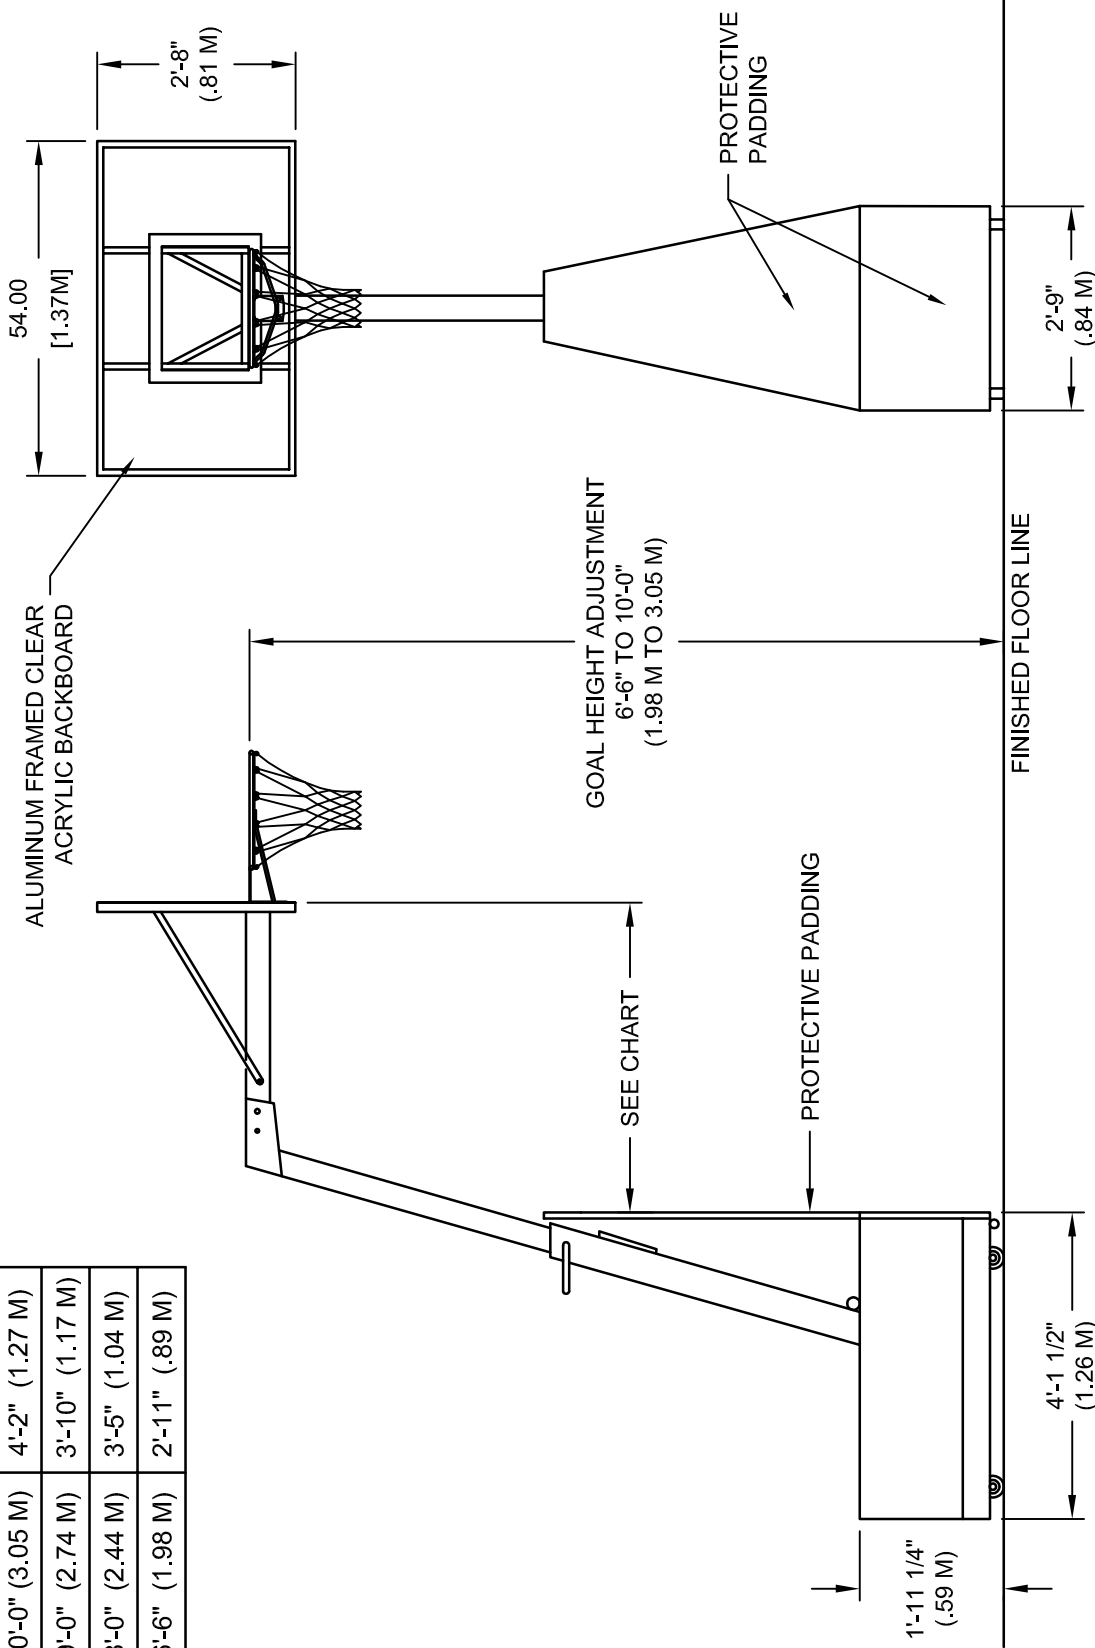

STORAGE DIMENSIONS	
MODEL	50XX
WIDTH	4'-6" (1.22 M)
LENGTH	5'-2" (1.57 M)
HEIGHT	6'-8 1/2" (2.02 M)

UNLOADED WEIGHT: 383 LBS (161 Kg)  
 MINIMUM PLAY WEIGHT: 683 LBS (297 Kg)

DIMENSIONS IN FEET / INCHES & (METERS)

REVISION		
REV.	DATE	BY




**Gared Holdings, LLC**  
 9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

**MICRO-Z54 FLOOR UNIT**

DRAWN	CROSBY	DATE	05-10-11	MATERIAL	N/A
APPROVED		DATE		FINISH	N/A
FILE LOC. Q:\Final Release\Specifications				DWG. NO.	
SIZE	SCALE	SHT. NO.	PART NO.	REV	
<b>A</b>	NONE	1 OF 1	<b>MICRO-Z54</b>		



## MICRO-Z54

### PORTABLE BASKETBALL GOAL

#### **FRAME**

The base is fabricated from 14-gauge sheet steel and coated with a durable white powder coat finish. The support post is heavy-wall 3-1/2" square tubing with a zinc-plated inner post that is spring loaded for easy adjustment. Unit adjusts from 6'-6" to 10'-0" and has a boom extension of 4'-2".

#### **BALLAST**

Empty weight of goal support is 383 lbs. Gross weight of the unit, including the minimum 300 lbs. of ballast, is 683 lbs. The preferred ballast material is patio blocks and is not included with the unit.

#### **WHEELS**

Each unit has 6" diameter wheels on the rear and 4" diameter swivel castors on the front. All wheels have a polyurethane surface.

#### **PADDING**

The front of each unit is padded with 1" polyurethane foam covered by 14-ounce vinyl.

#### **BACKBOARD AND GOAL**

GP5432 Board Assy, 32" x 54" x 3/8" Acrylic  
Model 724 Titan Plus Breakaway Goal

A unitized welded frame shall be constructed with (2) 1/8" thick aluminum angle struts and a 1/8" aluminum formed channel section to reinforce the area for the direct goal attachment. The backboard shall be framed with 1/8" thick formed aluminum angle sections joined at the corners by steel brackets. The backboard surface shall be constructed of 3/8" thick clear acrylic treated for UV protection, and abrasion resistance. White target lines shall be screened onto the back side of the board surface. Vinyl cushion tape shall be used between the aluminum frame members and the acrylic surfaces. Goal mounts on a 4h x 3w & 4h x 5w pattern and fits models 26WO, 39WO, 724, 726, & 1000.

Subject to design change and current manufacturing practices.  
Revised May 10, 2011 ©2008 Gared Holdings, LLC