


NOTES:

- 1) ADJUSTABLE NET ANGLE.
- 2) FOLDABLE LEGS FOR STORAGE.
- 3) WEIGHTED RUBBER FOOT PADS.
- 4) WIDE STANCE FOR STABILITY.



REVISION		
REV.	DATE	BY
-	-	-

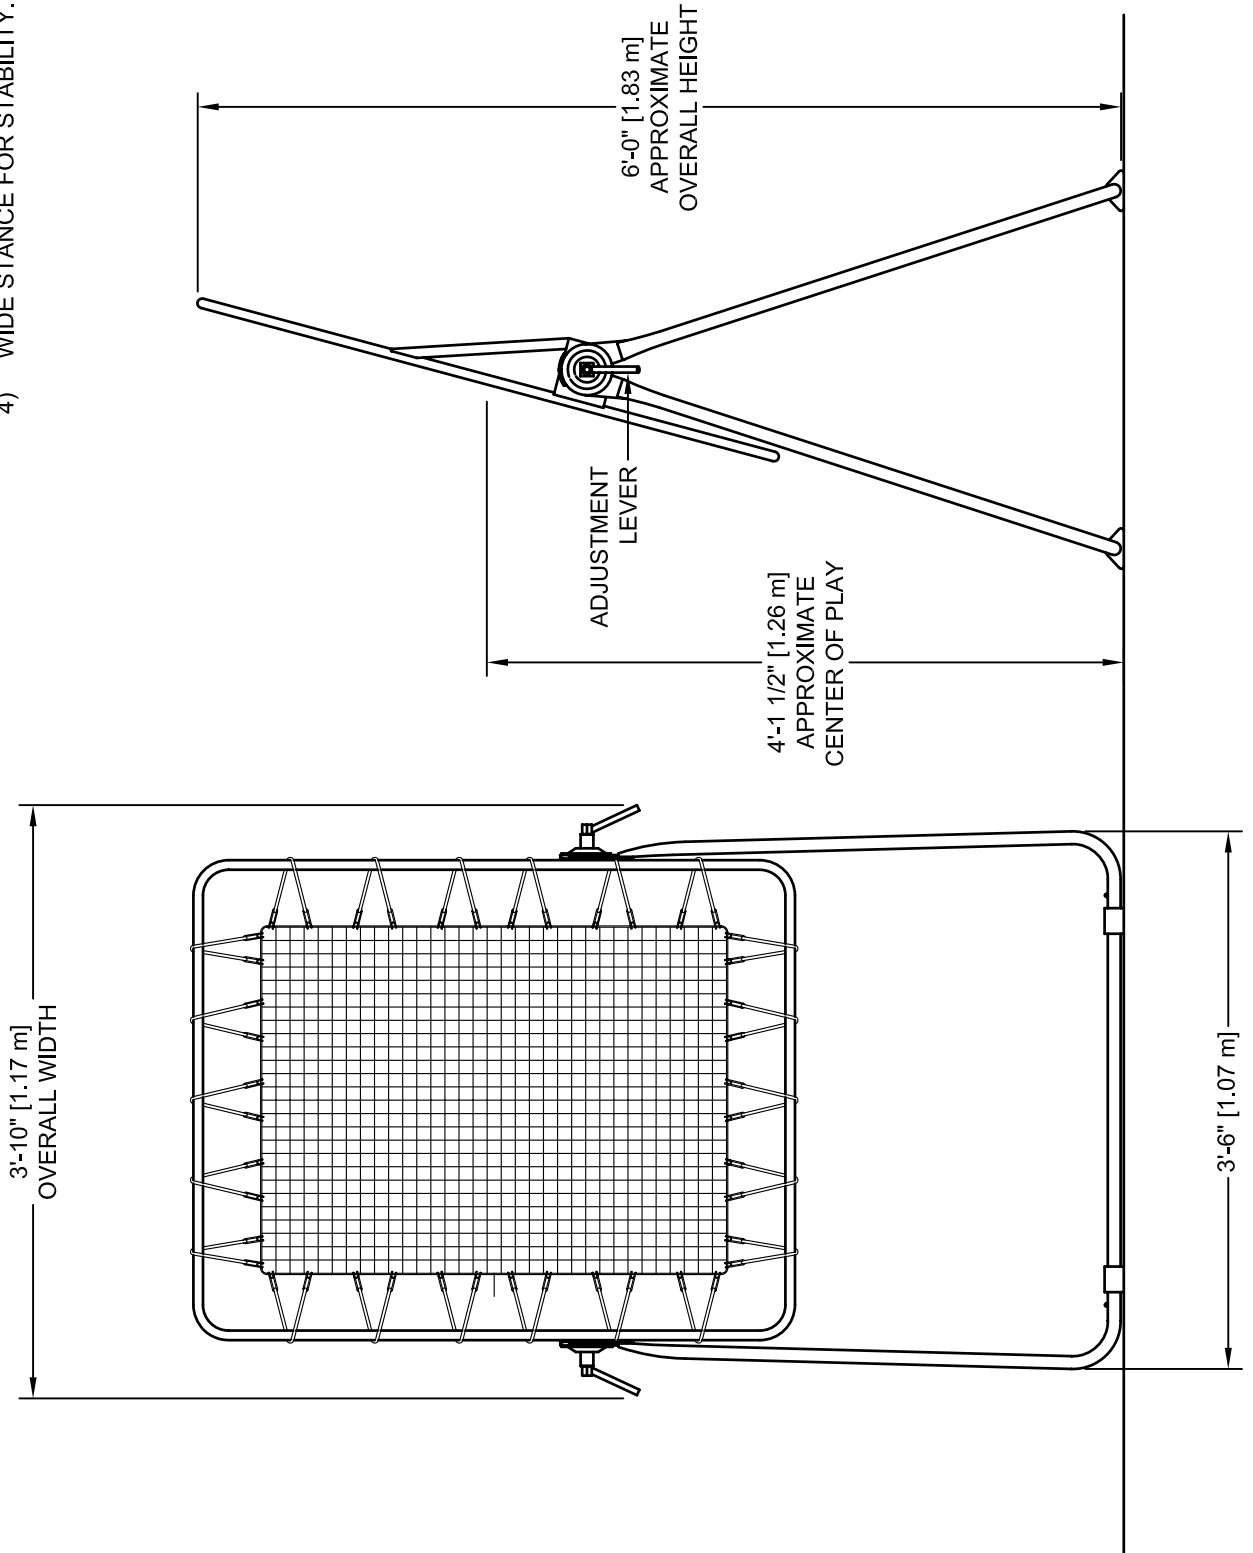


Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

PLAYMAKER TOSS BACK

DRAWN	RWP	DATE	06/19/05	MATERIAL	N/A
APPROVED	CONNERLEY	DATE	06/20/08	FINISH	N/A
FILE LOC. Q:\Final Release\Specifications				DWG. NO.	PLAYMAKER
SIZE	SCALE	SHT. NO.	PART NO.	PLAYMAKER	
A	NOTED	1 OF 1			
					REV
					-



MODEL PLAYMAKER

PLAYMAKER TOSS BACK®

The main support frame shall be constructed of 1" [25.4 mm] O.D. steel tubing. The net support frame shall be constructed of ¾" [19 mm] O.D. steel tubing. The main support frame shall be powder coated blue and the net support frame shall be powder coated orange. Main support frame shall be supported on four weighted rubber foot pads to provide stability of the unit during play.

Net shall be 2" [50.8 mm] square mesh from white 1/8" [3.0 mm] braided nylon cord (350 lb tensile strength minimum). Overall net dimensions shall be 2'-3 ¼" [692 mm] x 36" [915 mm]. Net shall be secured to frame by means of 22 specially designed rubber bands.

Net frame shall be adjustable for changing angle of net to provide a variety of return conditions for training. Net angle adjustment shall be secured by means of locking levers at the adjustment point on each side of the net.

Overall unit size is 3'-6" [1070 mm] wide x 6'-0" [1830 mm].

Subject to design change and current manufacturing practices.
Revised April 4, 2008 ©2008 Gared Holdings, LLC