



(2) KEY SWITCHES AND  
COVERS INCLUDED  
2x4x 2 1/2 BOX NOT INCLUDED

#### ELECTRICAL DATA



-2HP GEAR-MOTOR, 3PH 60HZ W/BRAKE  
& (1/4 HP TROLLEY MOTOR)

- ☐ 208 VAC, 6.1 A + (1.3 A)    ☐ 230 VAC, 5.9 A + (1.0 A)  
☐ 460 VAC, 3.5 A + (0.5 A)

-INCLUDES A KEY SWITCH AND 2x4 BOX COVER. A 2x4x2<sup>1</sup>/<sub>2</sub>"d  
JUNCTION BOX SUPPLIED BY OTHERS.

-FUSED DISCONNECT SUPPLIED BY OTHERS. ALL WIRING  
AND RECEPTICLES SUPPLIED BY OTHER.

-CORRECT MOTOR ROTATION MUST BE VERIFIED BY  
ELECTRICAL CONTRACTOR DURING ELECTRICAL  
INSTALLATION. REVIEW INSTALLATION MANUAL FOR  
IMPORTANT INSTRUCTIONS.

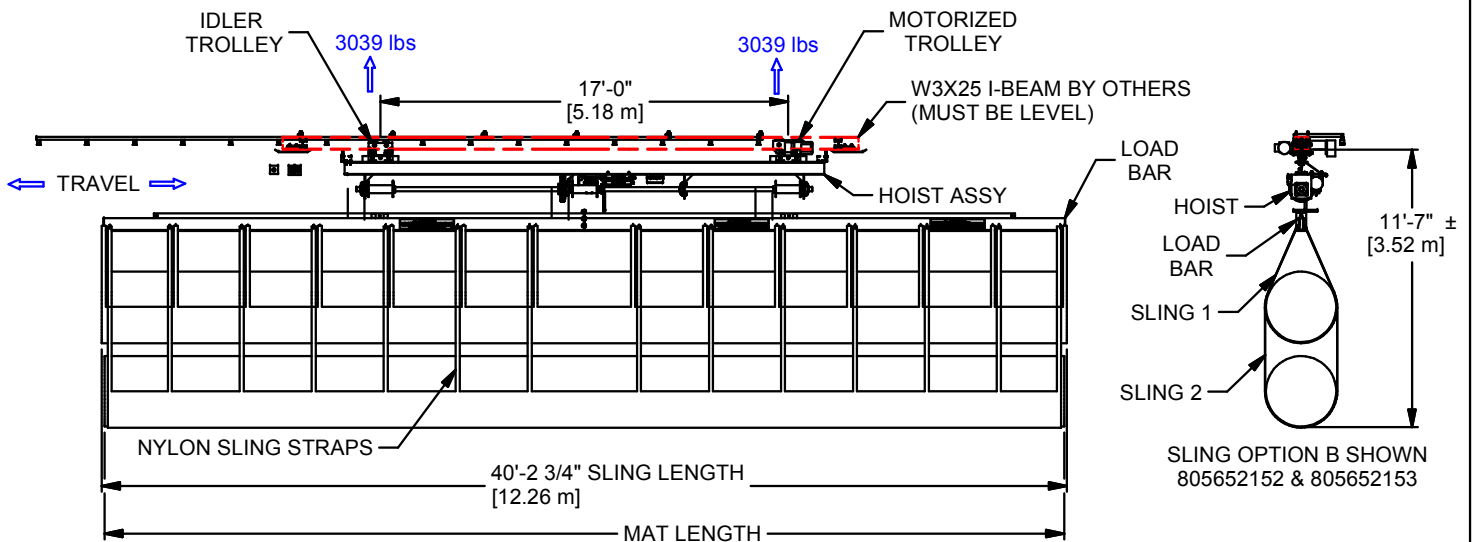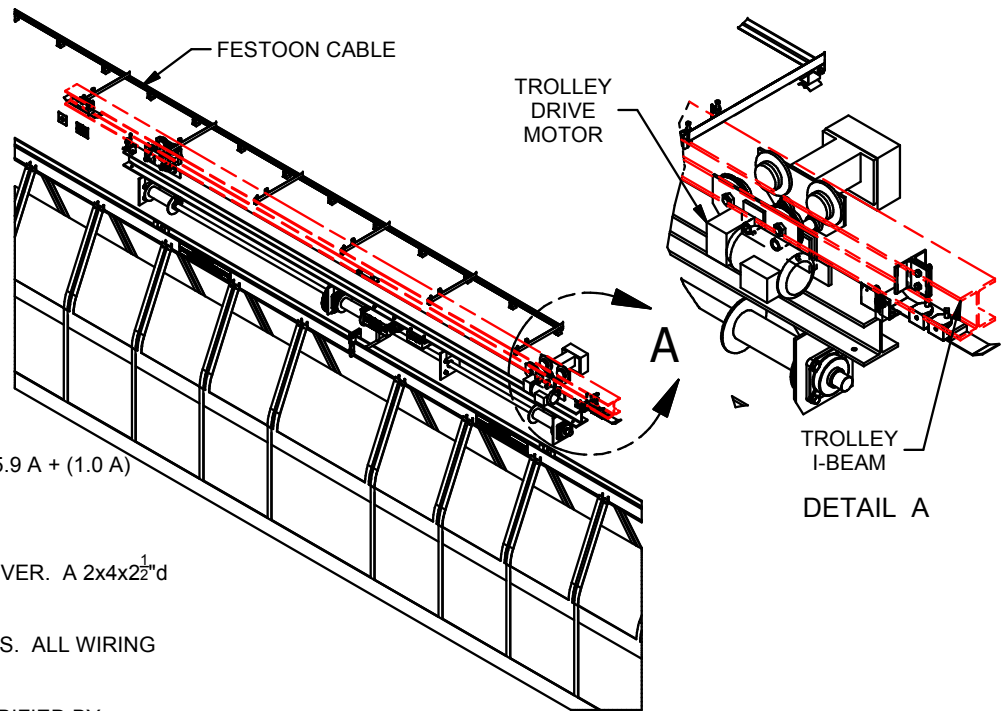

#### NOTES:

- STRUCTURE SUPPLIED BY OTHERS TO BE FIELD VERIFIED  
BEFORE PRODUCTION.
- KEY SWITCH MUST BE LOCATED IN AN AREA THAT ALLOWS  
THE HOIST TO BE VISIBLE TO THE OPERATOR, BUT CLEAR  
OF THE MAT LOAD.

	WEIGHT (lbs)
MAT HOIST ASSY, W/TROLLEY	1,400
LOAD BAR & SLING	837
(2) ROLLED MAT (maximum)*	3,840
TOTAL	6,077

\*TOTAL MAT LENGTH NOT TO EXCEED 42'




Gared Holdings, LLC  
9200 E. 146th St. Noblesville, IN 46060


THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS  
WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT  
AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT  
AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

#### MAT HOIST, 40' DBL LOAD BAR, MOVING


DRAWN	CROSBY	DATE	11/10/2016	DATE ISSUED
APPROVED		DATE		
FILE LOC.	Q:\Inventor Files\Specification Files\10_Curtains			
SIZE	SCALE	SHT. NO.	PART NO.	REV
A		1 OF 3	4096-DS	B

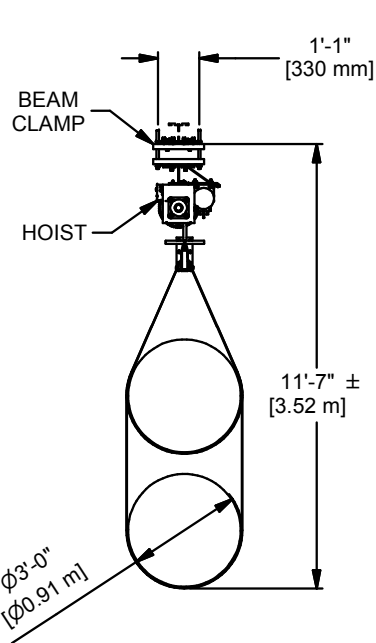

SLING OPTION B  
805652152 & 505652153

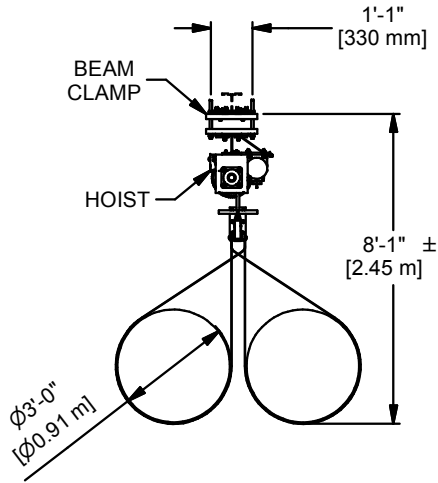

SLING OPTION C  
(2) 805652152

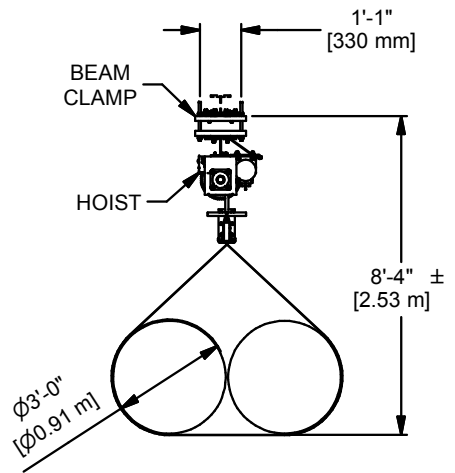

SLING OPTION D  
505651521



Gared Holdings, LLC  
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

### MAT HOIST, 40' DBL LOAD BAR, STATIONARY

DRAWN	CROSBY	DATE	11/10/2016	DATE ISSUED
APPROVED		DATE		
FILE LOC. Q:\Inventor Files\Specification Files\10_Curtains				
SIZE	SCALE	SHT. NO.	PART NO.	REV
A		2 OF 3	4096-DS	B

B	WDC	11-10-16
REV	BY	DATE



**MODEL 4096-DS**  
**MOVING WRESTLING MAT STORAGE SYSTEM**  
**WITH 40' LOAD BAR FOR DOUBLE SLING**

**RECOMMENDED APPLICATION**

This unit allows user to gain storage space and reduce risk of injuries to students and coaches. Simply roll the mat into the vinyl sling, attach it to the load bar and turn the key. The mats are easily raised and stored at ceiling height. The 4096-DS wrestling mat storage system lifts two mat rolls up to 42 ft long and can be easily mounted in most gyms. Once the mats are raised the motorized trolley system moves the mats away from the main room.

**SPECIFICATIONS**

**OVERHEAD SUPERSTRUCTURE**

The model 4096-DS Wrestling Mat Storage System is supported from the roof structure. A W6 x 25 I-beam, serving as the trolley track, is supplied and installed by general contractor. The supplied beam must be level.

**DRIVE / SUPPORT STRUCTURE**

Drive and spools are attached to a W6 x 25 I-beam frame weldment for rigid support. A one piece 2" solid keyed drive shaft runs on four self-aligning machined ball bearing pillow blocks. Unit includes three 4" diameter cable drums to prolong cable life. Lifting rate shall be 13.6 fpm. Finish shall be black power coat. Unit is shipped upright on metal stands for safer installation.

The model 4096-DS Wrestling Mat Storage System shall be operated by a 2 horsepower, 3ph reversible motor available for connection to 208, 230, or 460 VAC power. Unit includes a 48 to 1 industrial in-line helical gear speed reducer and a 20-ft./lbs. electric brake. The trolley is driven by a ¼ horsepower gear motor.

Motor controls include motor reversing contactors and motor overload protection. Fused disconnect is to be provided by others. An audible alarm shall sound when unit is operating. Two key switches and 2x4" switch covers are included. Key switches must be located in an area that allow the hoist to be visible to the operator, but clear of the mat load. Limit switches shall control the up and the down travel and moving travel. A second up limit switch shall be included for extra safety. The trolley motor is interlocked so that it can travel only in the up position. Controls are shipped attached to the hoist frame and are factory wired and tested.

A 40' long, welded 2" x 6" rectangular load bar is raised by three 5/16" galvanized carbon steel aircraft grade cables. Cables shall have an ultimate load rating of 9800 lbs each. Load bar shall be equipped with steel hooks to accommodate "D" rings on sling straps.

**SLING**

Mat slings shall be constructed of 18-ounce vinyl with twelve 2" wide nylon straps that wrap all the way around the sling. Nylon straps to have 7000 lb breaking strength and "D" rings and self-closing hooks at end of strap.

**OPTIONS**

155655941 MAT HOIST SAFETY STRAP PACKAGE (includes (2) 1109 Mat Locks)  
801703914 RELAY BOX ASSY (for use with TSC2000 series control system)