
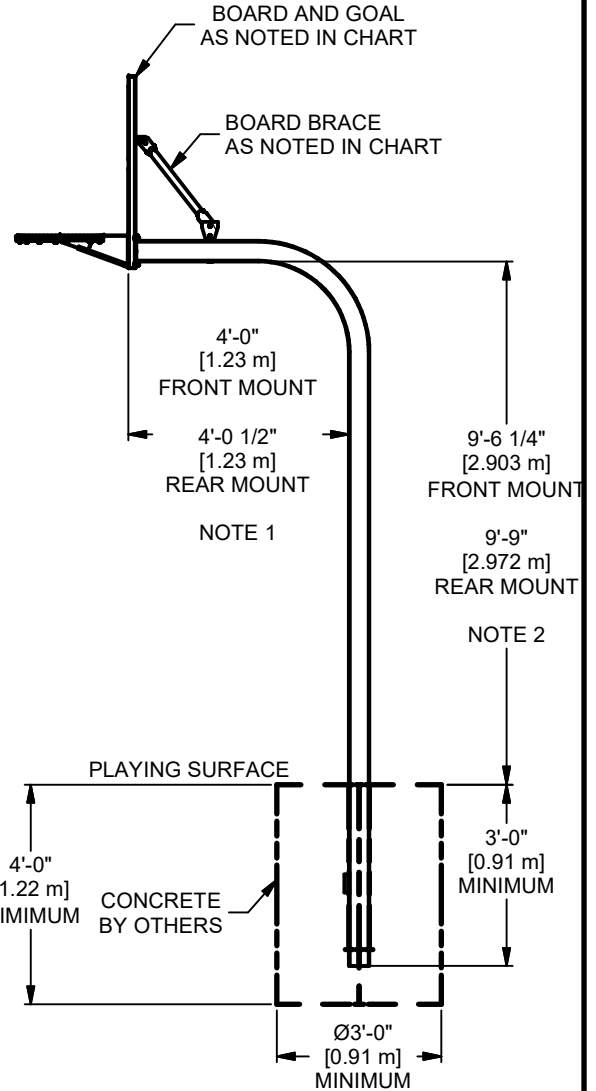
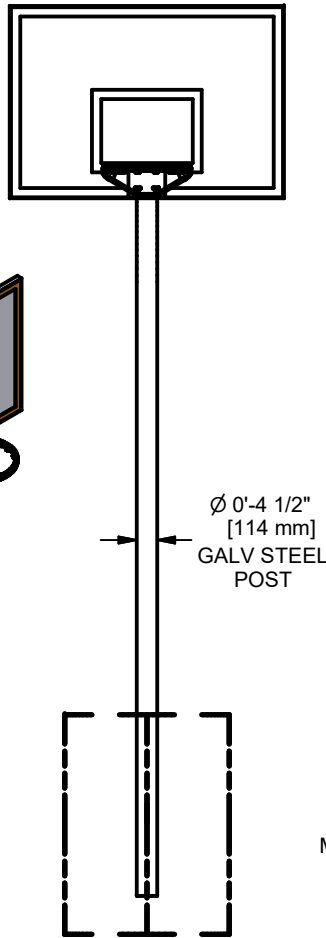


Package	Type	Board	Goal	Brace
PK4530	Front	BB60A38	5500	Yes
PK4540	Front	1245T	240	Yes
PK4560	Front	1260B	240	Yes
PK4565	Front	1750B	240	Yes
PK4570	Rear	1266B	266	Yes
GNA45	Front	None	None	None
GNA45R	Rear	None	None	None
GN45	Front	None	None	Yes*
GN45R	Rear	None	None	Yes*

* Braces are for "fan style" mounts only.

NOTES:

1. DIMENSION IS FROM FRONT SURFACE OF POST TO FRONT FACE OF BACKBOARD. DIMENSION MAY VARY WITH BOARD SELECTION.
2. DIMENSION IS FROM UNDERSIDE OF POST ARM SURFACE TO THE PLAYING SURFACE.

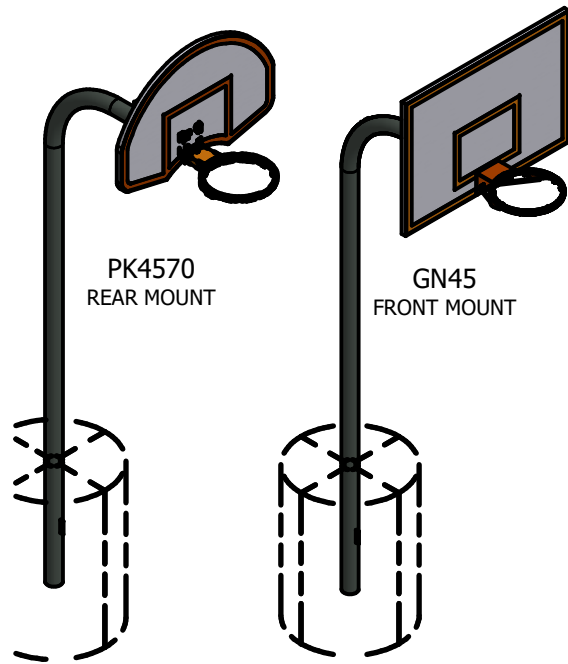

C	MJP	03-22-21
B	WDC	06-01-20
A	WDC	09-11-17
REV	BY	DATE



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

4 1/2" GOOSENECK SYSTEM, 4 FT EXT.

DRAWN	CONNERLEY	DATE	5/18/2010	DATE ISSUED	5/18/2010
APPROVED	CONNERLEY	DATE	5/18/2010		
FILE LOC. Q:\Inventor Files\Specification Files\06_Outdoor					
SIZE	SCALE	SHT. NO.	PART NO.	REV	
A	NONE	1 OF 2	GN45	C	



MODEL GN45 & GN45R

GOOSENECK OUTDOOR BASKETBALL SYSTEM W/ BRACES

GN45 / GN45R

This unit uses a gooseneck design to extend the backboard 48" out from the post. The post shall be 4 1/2" O.D. x 0.18" wall galvanized tube. The mounting plate is used as a direct goal attachment for the backboard. Two braces extending from the upper mounting points of the backboard to the gooseneck extension provide added rigidity to the system. The GN45 system can be used with all outdoor front mount and the GN45R system with rear mount boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

MODEL GNA45 & GNA45R

GOOSENECK OUTDOOR BASKETBALL SYSTEM

GNA45 / GNA45R

This unit uses a gooseneck design to extend the backboard 48" out from the post. The post shall be 4 1/2" O.D. x 0.18" wall galvanized tube. The mounting plate is used as a direct goal attachment for the backboard. The GNA45 system can be used with all outdoor front mount and the GNA45R system with rear mount boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

NOTE:

If board is greater than 36" wide, use the GN45 or GN45R model with board braces.

ACCESSORIES

PP4WR Wrap-Around Pole Pad